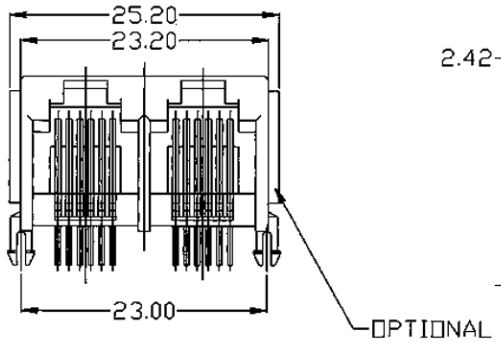



Note:

1. Material:
   - 1.1 Insulator: ABS Resin(UL94V-0)
   - 1.2 Contact:Phosphor Bronze Ag Plated Over Ni Plated

2. Specification:
   - 2.1 Current rating: 1.5A Max.
   - 2.2 Voltage rating:125VAC
   - 2.3 Contact resistance:20mΩMax.
   - 2.4 Insulation resistance:100MΩ Min.
   - 2.5 Dielectric withstanding Voltage:AC 500V

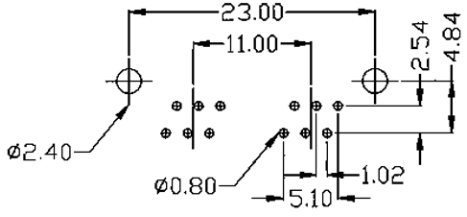

PCB LAYOUT

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	深圳市灿科盟实业有限公司 CKmtw CHANKLEMENT INDUSTRYCO.,LTD
CHECKED:	DATE:	TITLE: RJ11-6P(6C,4C,2C) 双胞胎
DRAWN: LYF	DATE: 2009-06-22	CLIENT P/N / ; UNIT mm ; SCALE free ; FILE NO. CKMtw-RJ11-0002 ; REV. A