


DIM	PIN	9Pin	15Pin	25Pin	37Pin
A		30.80	39.20	53.05	69.40
B		25.00	33.30	47.05	63.50
C		16.92	25.25	38.95	55.40
D		19.20	27.70	41.10	57.30
E		10.80	10.70	10.70	10.70

- Material:**
1. Insulator: PBT+30%Glass Fiber (UL94V-0)
  2. Contact: Brass C2680 H65
  3. Contact Plated: gold plated over Nickel
  4. Shell: SPCC-SD
  5. Shell Plated: Cu60u"/Ni100-120u" and Cu60u"/Sn100-120u"
- SPECIFICATION:**
1. Contact Current Rating: 3AMPS
  2. Insulation Resistance: 1000M Ohm MIN AT 500V DC
  3. Dielectric Withstanding Volt: AC 500V (R.M.S)/1 minute
  4. Operation Temperature: -55° C ~ +105° C

铆钉型式说明

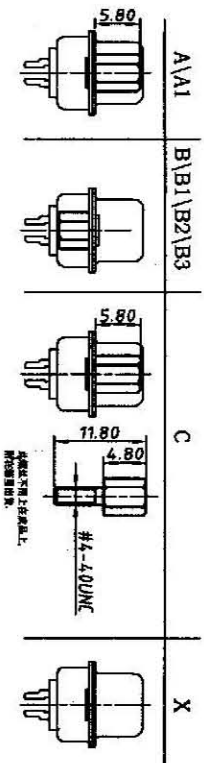

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:

DATE:

CHECKED:

DATE:

DRAWN:

DATE:

LYF

2009-07-17

TITLE:

DB-XP 母头 焊线式

深圳市灿科盟实业有限公司  
CKMTW CHANKLEMENT INDUSTRY CO., LTD

P/N

UNIT mm SCALE free

FILE NO. CKMTW-DB-0001 REV. A SH00