

NOTES:

MATERIAL :


- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.SHIELD :0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- 5.LED :OPTION

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1. DURRABILITY :750 CYCLES MIN.
 - 2.PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- 1. STORAGE : -40 $^{\circ}\text{C}$ ~+85 $^{\circ}\text{C}$
 - 2. OPERATION : -25 $^{\circ}\text{C}$ ~+85 $^{\circ}\text{C}$

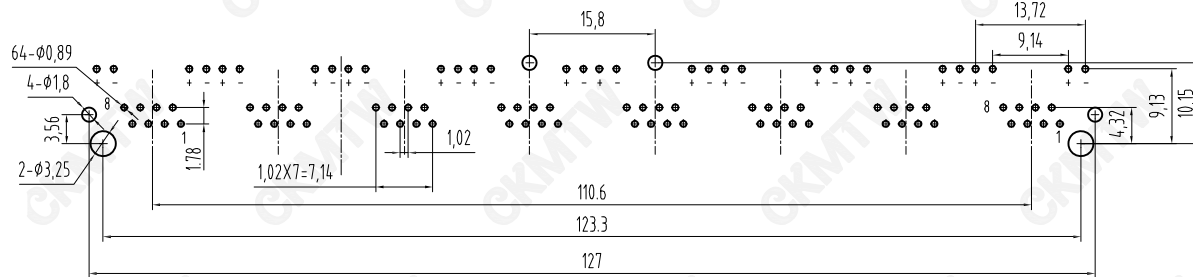

PC Board Layout
Component Side Shown

TOLERANCE TABLE	
.0	±0.30
.00	±0.20
.000	±0.05

APPROVED:	DATE:	C _{kmtw} 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: RJ45-8P/8C 5JA-1*8P 八胞胎 弯插 带屏蔽 带灯带弹			
DRAWN: L. YUN	DATE: 2020-11-13	PROD. NO.	R-RJ45R08P-C801		
		UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-RJ45-0227	REV.	A